


EDN468MS


4-Megapixel IR, Motorized,
Outdoor Stainless Steel Dome
Network Camera

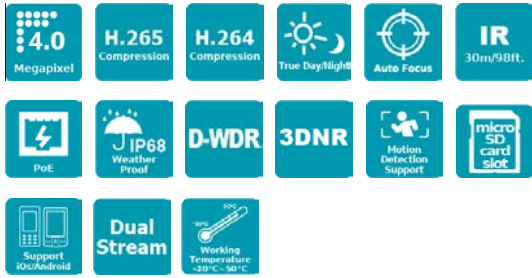

Features

- 4M CMOS sensor
- Marine Grade Stainless Steel (AISI 316) can withstand harsh and corrosive environment
- Motorized 2.8-12mm lens to capture desired field of view
- Provides Digital Wide Dynamic Range function
- Provides True Day/Night with automatic IR filter
- Extended IR range of up to 30m / 98ft with 12 IR LEDs. (Depending on the IR reflectivity in the actual scene)
- Supports dual streams of H.265 and H.264
- Supports Motion Detection and Email Notification
- Equipped with weather proof (IP68) and vandal resistance (IK10) housing
- Flexible viewing angle with 3-Axis design
- Supports live video monitoring for mobile devices via MobileFocus App (iOS and Android)
- Supports Power over Ethernet / 12VDC
- ONVIF profile S compliant
- Supports Micro SD card (up to 128GB)

Dimensions

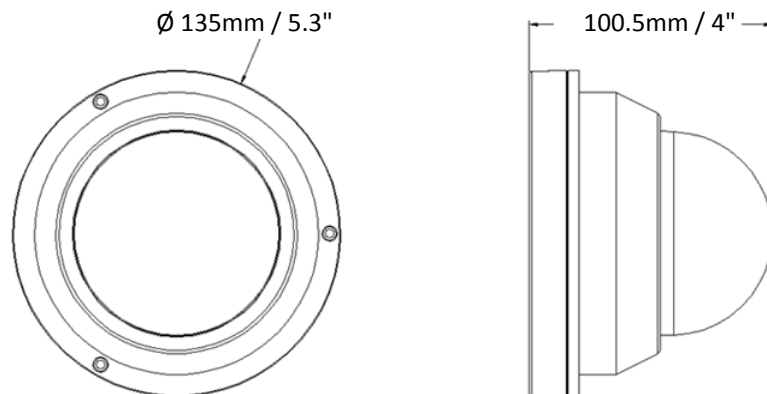

Optional Accessories

IP Sidekick

IP Sidekick - ESK1000



Using it for installation, you do not need to pre-configure the IP address or to use an additional monitor to check and adjust all the IP cameras. The product can assign an IP address to the camera, and then you can connect and check the IP camera live view using our mobile app EF Sidekick. For details about IP Sidekick, please refer to the IP Sidekick – ESK1000 User's Manual.

PoE Switch

EverFocus 5 / 8 / 16 / 24 Ports PoE Switch



5 Ports: ES0501-40

8 Ports: ES0812-31 / ES0802-41

16 Ports: ES1625-31 / ES1645-51

24 Ports: ES2426-31 / ES2446-51 / ES2448-62

Specification

Model No.	EDN468MS		
Pickup Device	4M CMOS sensor	Image Settings	Contrast, Brightness, Saturation, Sharpness, Mirroring of Images
Lens	Motorized 2.8-12mm lens	Intelligent Alarm	Video Loss, Network Anomaly, Tampering Alarm, Storage Exception, Motion Detection
FOV (H x V x D)	31°~84° x 19°~48° x 36°~97°	Event Trigger	Motion Detection, Tampering Detection
Minimum Illumination	Color: 0.5Lux @F1.4 B/W: 0.2Lux @F1.4	Notification	Email Notification, Live View Window Notification, Push Notification (via MobileFocus App)
Day/Night	True Day/Night with ICR	Password Protection	Supported
Iris	Fixed Iris	Storage	Micro SD / SDHC / SDXC slot (Max. 128G, up to class 10)
Electronic Shutter	Auto / Manual (1/25 ~ 1/10,000) / Flickerless	IR LED	12 Units
Video Compression	H.265 / H.264	IR Distance	30m / 98ft.
Max. Video Resolution	2592 x 1520	Power Supply	12VDC
Frame Rate	25fps(Pal) / 30fps(NTSC)	Power over Ethernet	PoE IEEE802.3af (Class 3)
S/N Ratio	≥ 35db (AGC OFF)	Max. Power Consumption	12VDC 4.5W / PoE 4.9W
AGC	Yes	Humidity	0% ~ 90% not condensing
AWB	Yes	Operating Temperature	-20°C ~ 50°C / -4°F ~ 122°F
D-WDR	Yes	Dimensions (Φ) x (H)	135 x 100.5mm / 5.3" x 4"
3DNR	Yes	Weather Resistance	IP68
Interface	RJ-45 10M/100M adaptive	Vandal Resistance	IK10
Supported Protocols	TCP/IP, UDP, HTTP, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, ONVIF	Weight	2300g / 5.07lb
Reset Button	Yes	Certificates	CE, FCC, RoHS
Stream Type	Complex stream / Video stream		

Find Out More At:

EverFocus Taiwan HQ:
TEL: +886 2 2698 2334
www.everfocus.com.tw
marketing@everfocus.com.tw

EverFocus USA - California:
TEL: +1 626 844 8888
www.everfocus.com
sales@everfocus.com

International Branch Offices:
Germany, China, Japan

